



COMMERCIAL LED WALL PACK

Model: WP RC LED 88L BZ 120 277

Specifications

| | |
|-----------------------|-----------------------|
| Power | 80W |
| Voltage Input | 120-277 Vac, 60HZ |
| Lumen Output | 8800lm |
| Color Temperature | 4000K |
| CRI | 70 |
| IK Rating | IK07 |
| Power Factor | 0.95 |
| Lens | Tempered Glass |
| Operating Temperature | -13°F ~ 122°F |
| IP Rating | IP65 |
| Certificates | ETL/cETL, DLC |
| Warranty | 5 Years |
| L70 Life Span | >50,000 Hours |
| Housing Material | Aluminum |
| Beam Angle | 45/100 Degree |
| Dimmable | No |
| Weight | 10.4 lbs |
| Packaging Dimension | 15.7"L x 13"W x 9.4"H |




Installation:
Mount to standard 4" junction box
or wall mount using 1/2" threaded
entry hubs and conduit.



Order Information

| Series | Source | Lumens | Finish | Voltage |
|--------|--------|--------|--------|----------|
| WP RC | LED | 88L | BZ | 100-277V |

Product Size

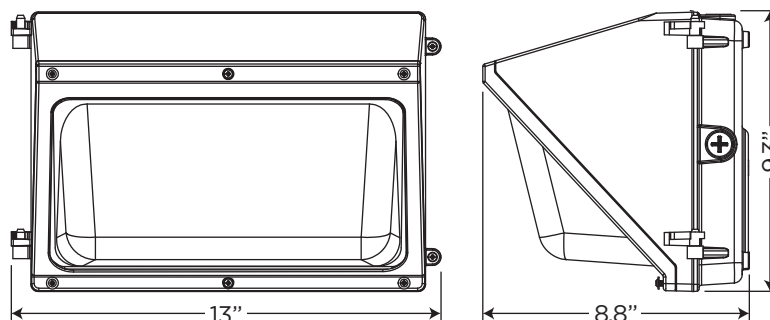


**Precision Consumer
Products Group, LLC.**

11024 Balboa Boulevard • Suite 1710
Granada Hills, CA 91344


1-866-237-9983
www.precisioncpg.com




Photometric Diagrams

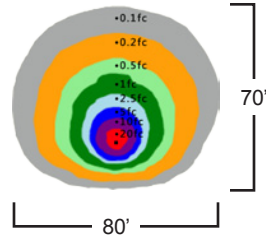

Mounted at 10 feet

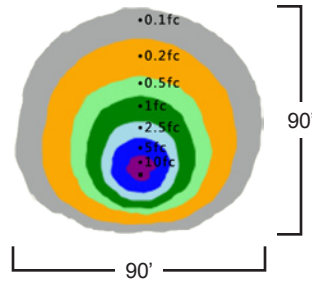

Mounted at 15 feet

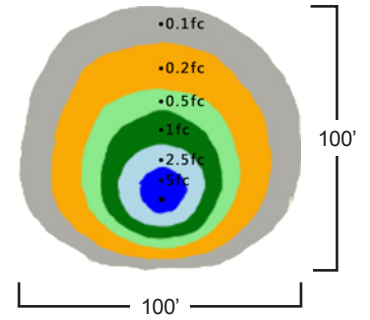

Mounted at 20 feet

Photometric test number BL170301004-9 tested in accordance with IES LM-79-08 standards by a NVLAP certified laboratory. Fixture photometry was completed on a single representative fixture.